



tilebar LVT

LUXURY VINYL TILE

12 MIL | 6 MIL

RENEW | Glue Down

WOOD



tilebar LVT
LUXURY VINYL TILE

ReNew | White Oak Vintage | 6"x48"



ReNew | Scarlet Oak Studio | 6"x48"



ReNew | Bur Oak Veranda | 6"x48"



ReNew | Lofty Oak Anthracite | 6"x48"



ReNew | Scarlet Oak Fawn | 6"x48"




ReNew | Metro Oak Brown Sugar | 6"x48"



ReNew | Opulence Oak Gingered | 6"x48"



ReNew | Majestic Maple Natural | 6"x48"

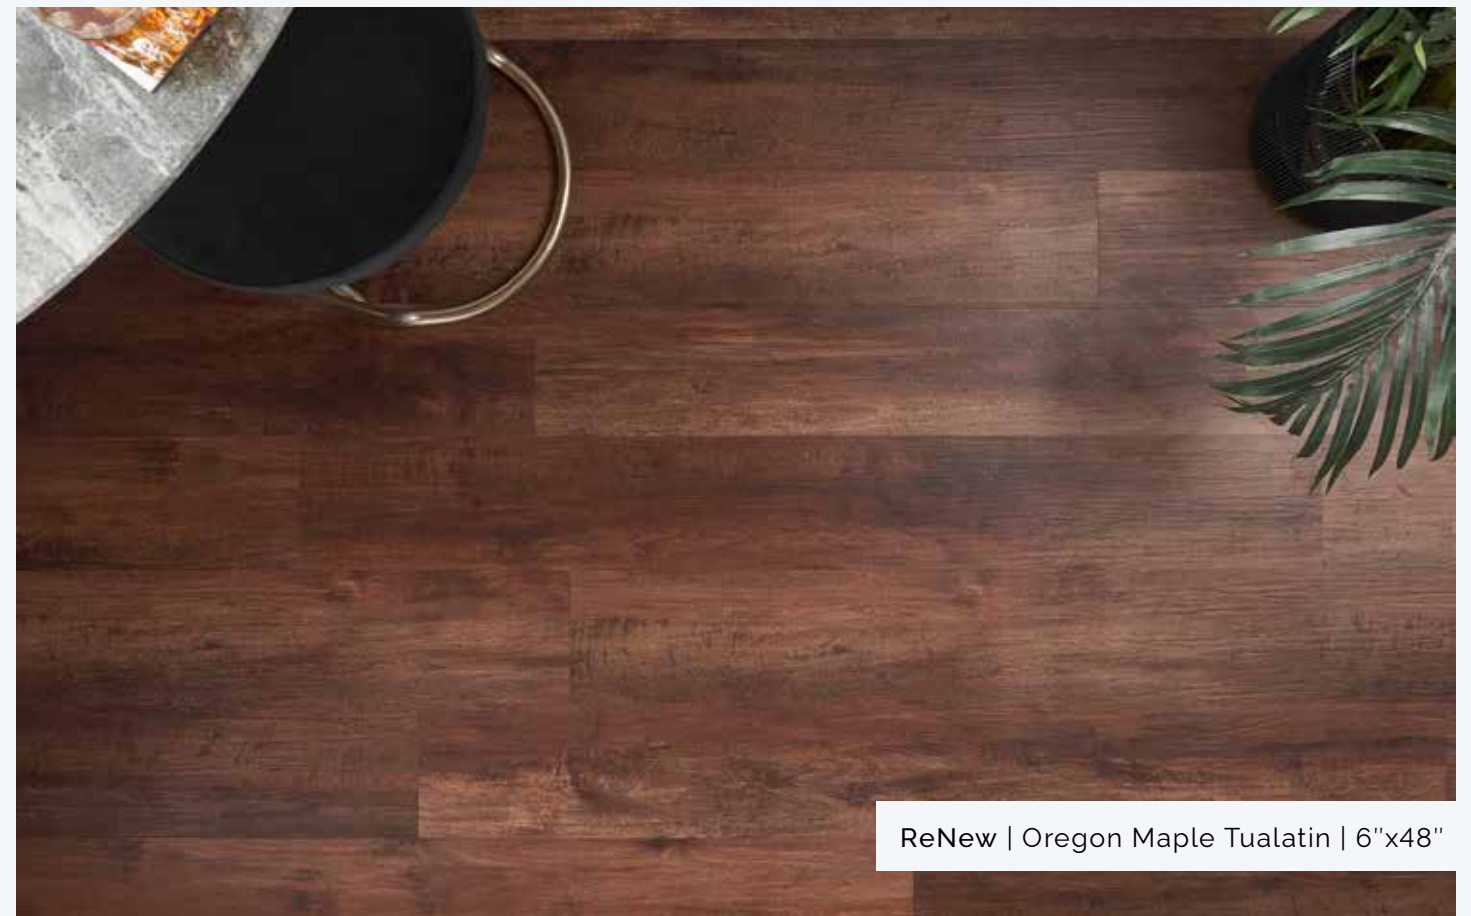


ReNew | Oregon Maple Tualatin | 6"x48"



ReNew | Aspen Pecan Chelsea Gray | 6"x48"



ReNew | Spice Birch Moon | 6"x48"

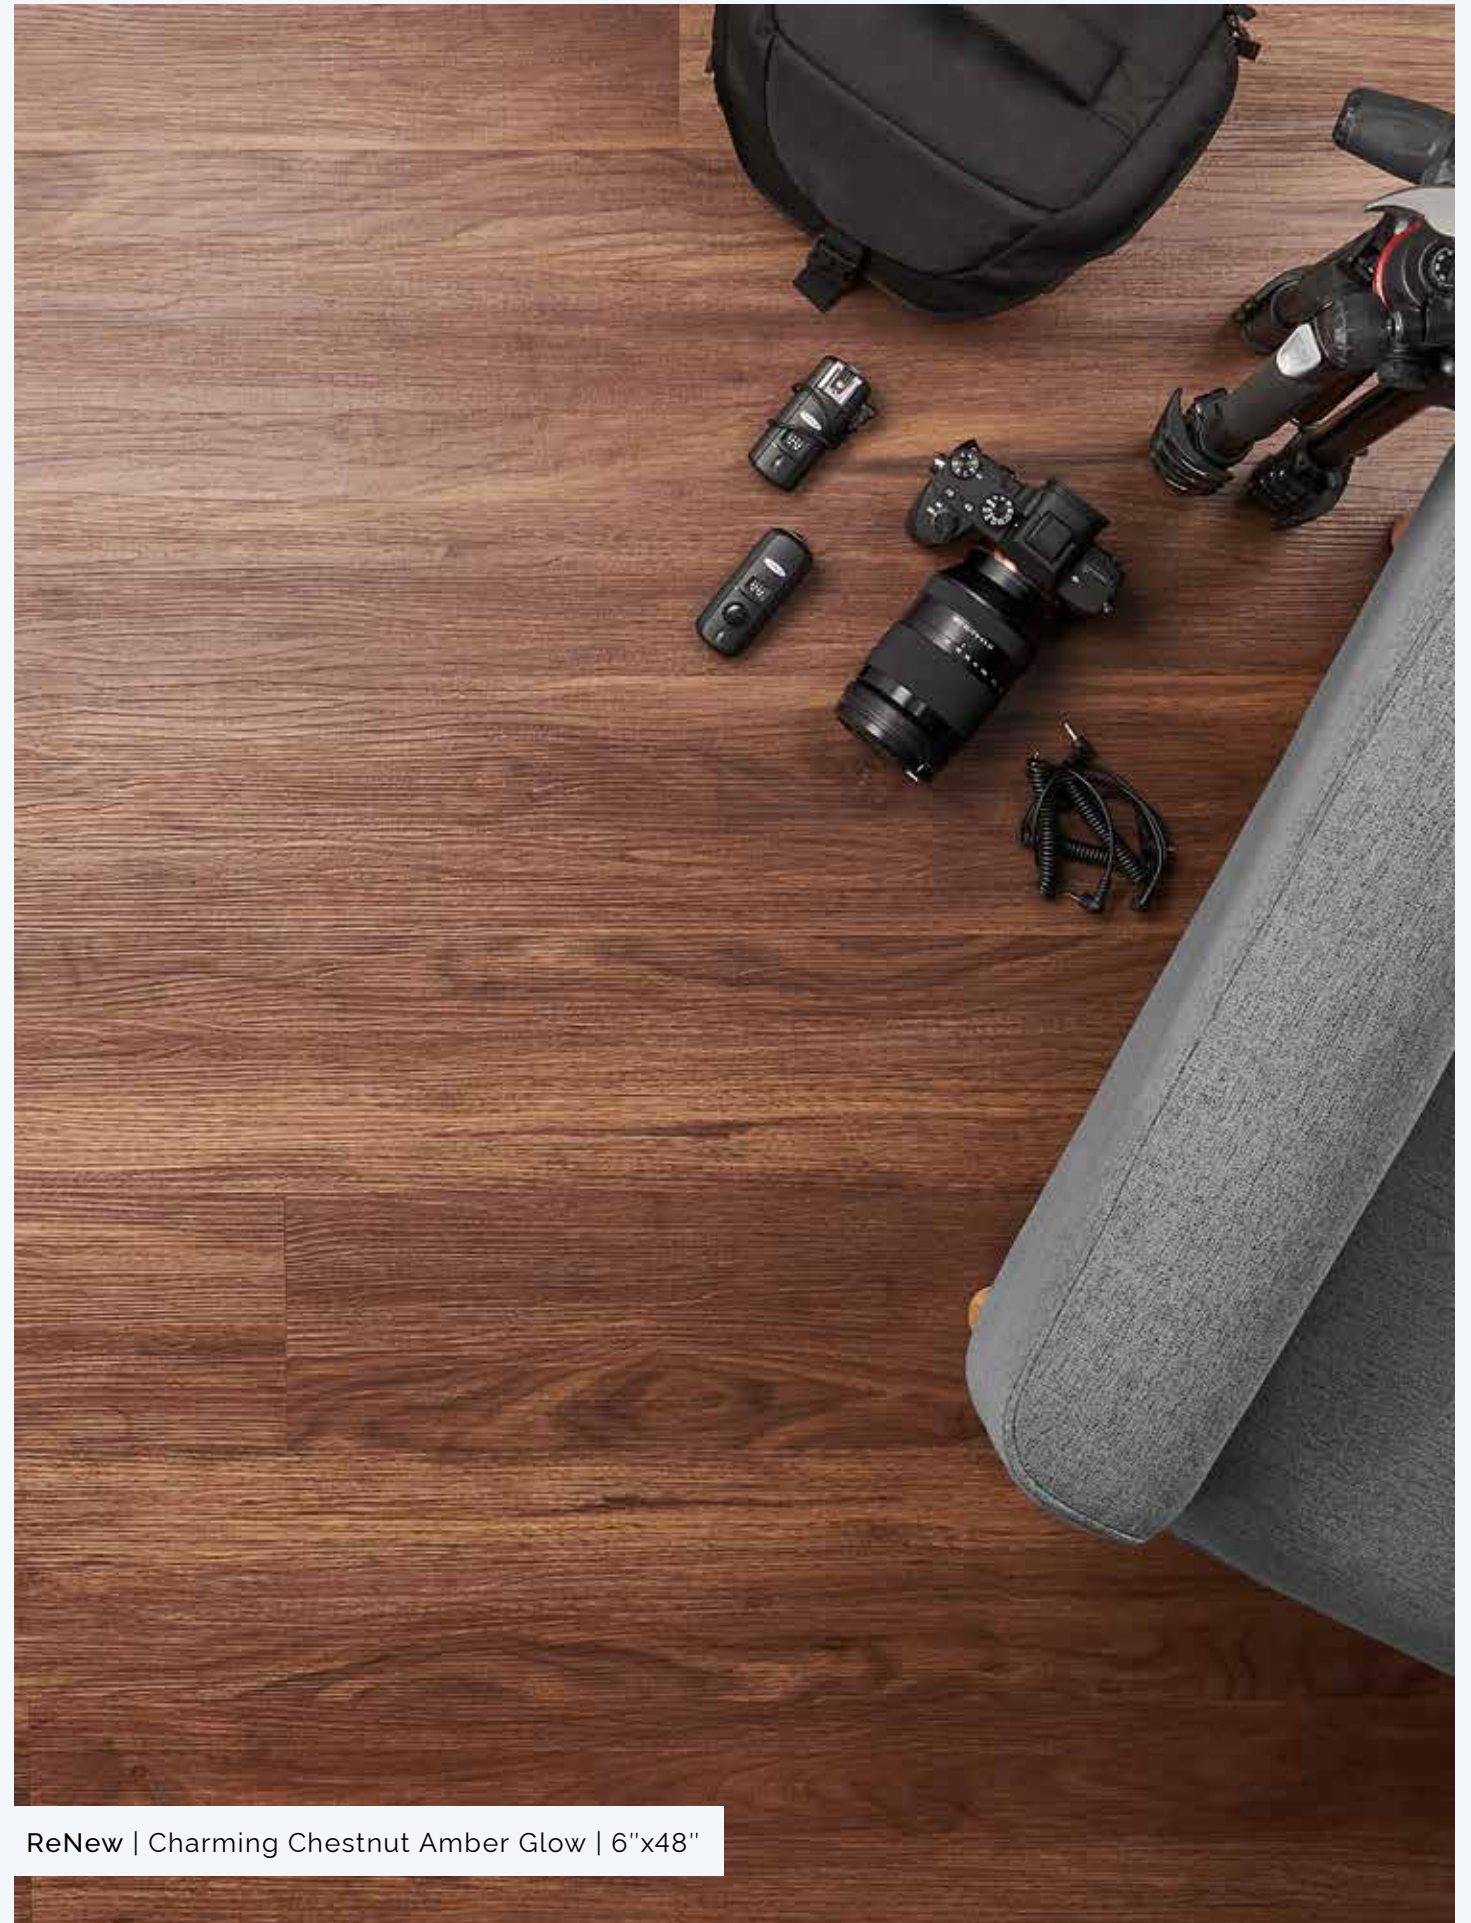

ReNew | Charming Chestnut Amber Glow | 6"x48"

METALCRETE



ReNew | Metalcrete Wildmist | 12"x24"

tilebar LVT
LUXURY VINYL TILE



ReNew | Metalcrete Crest | 12"x24"



ReNew | Metalcrete Mountain Dusk | 12"x24"




ReNew | Metalcrete Mountain Dusk | 12"x24"



ReNew | Metalcrete Charcoal | 12"x24"




ReNew | Metalcrete Wildmist | 12"x24"

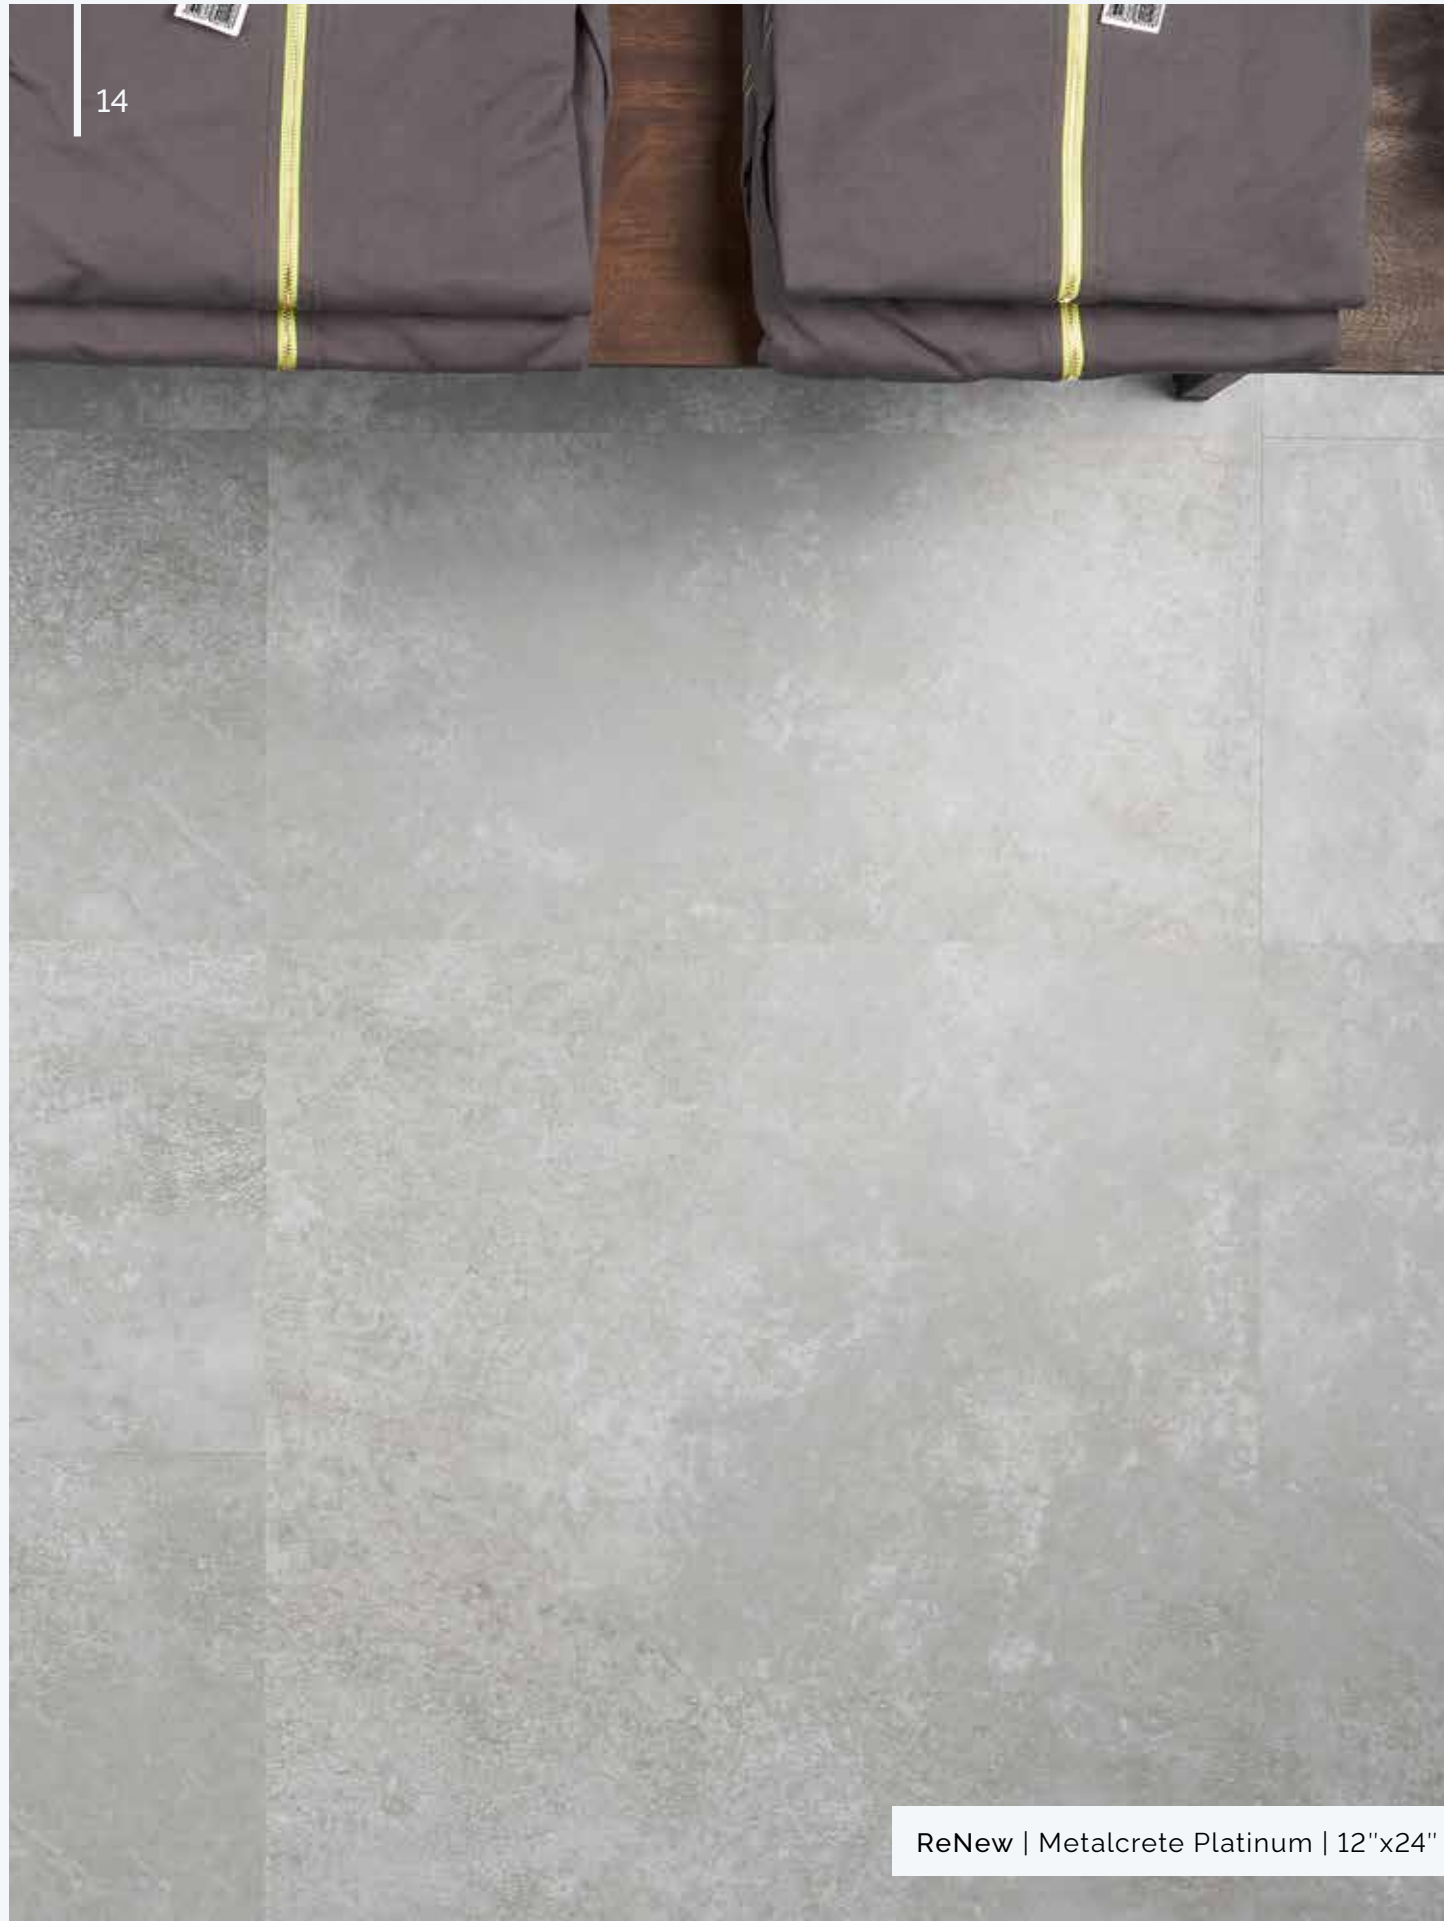

ReNew | Metalcrete Platinum | 12"x24"



ReNew | Metalcrete Pewter | 12"x24"

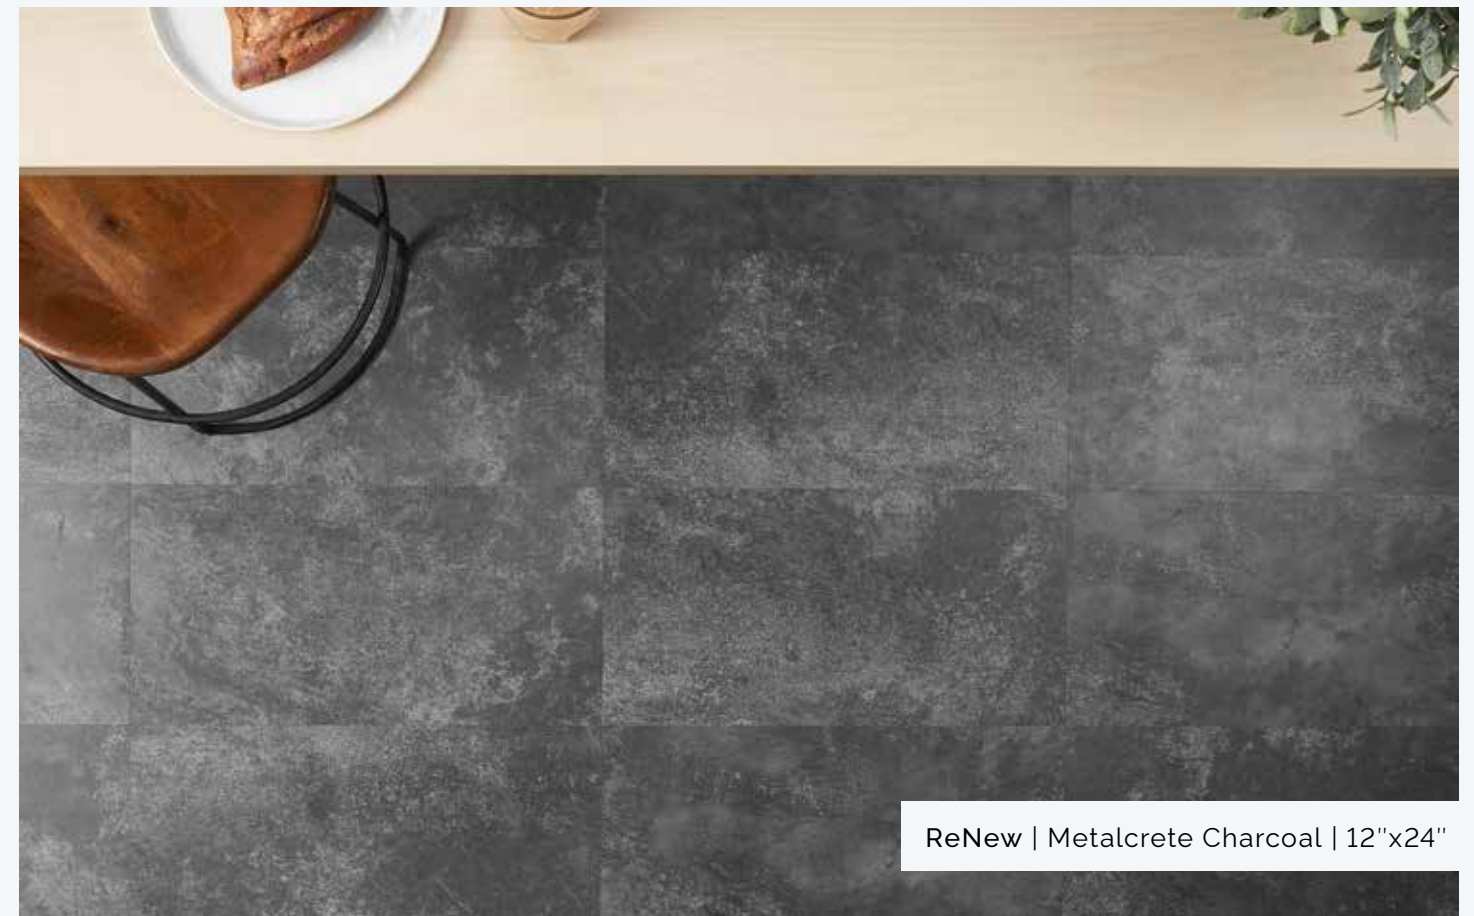


ReNew | Metalcrete Charcoal | 12"x24"

IRENEW Glue Down

SIZES + FORMATS



12"x24"




6"x48"

DESIGN	SIZE	12 MIL	6 MIL
White Oak Vintage	6"x48"	●	■
Aspen Pecan Chelsea Gray	6"x48"	●	●
Scarlet Oak Studio	6"x48"	●	●
Bur Oak Veranda	6"x48"	●	■
Lofty Oak Anthracite	6"x48"	●	■
Spice Birch Moon	6"x48"	●	■
Scarlet Oak Fawn	6"x48"	●	■
Metro Oak Brown Sugar	6"x48"	●	●
Majestic Maple Natural	6"x48"	●	■
Opulence Oak Gingered	6"x48"	●	●
Charming Chestnut Amber Glow	6"x48"	●	■
Oregon Maple Tualatin	6"x48"	●	■
Metalcrete Crest	12"x24"	●	●
Metalcrete Mountain Dusk	12"x24"	●	■
Metalcrete Wildmist	12"x24"	●	■
Metalcrete Platinum	12"x24"	●	●
Metalcrete Pewter	12"x24"	●	■
Metalcrete Charcoal	12"x24"	●	■

● In Stock | ■ Available to Order

Select colors from 6 mil wear layer thickness available by Special Order only. Minimum order one pallet, with an 8-12 week lead time.

IRENEW Glue Down

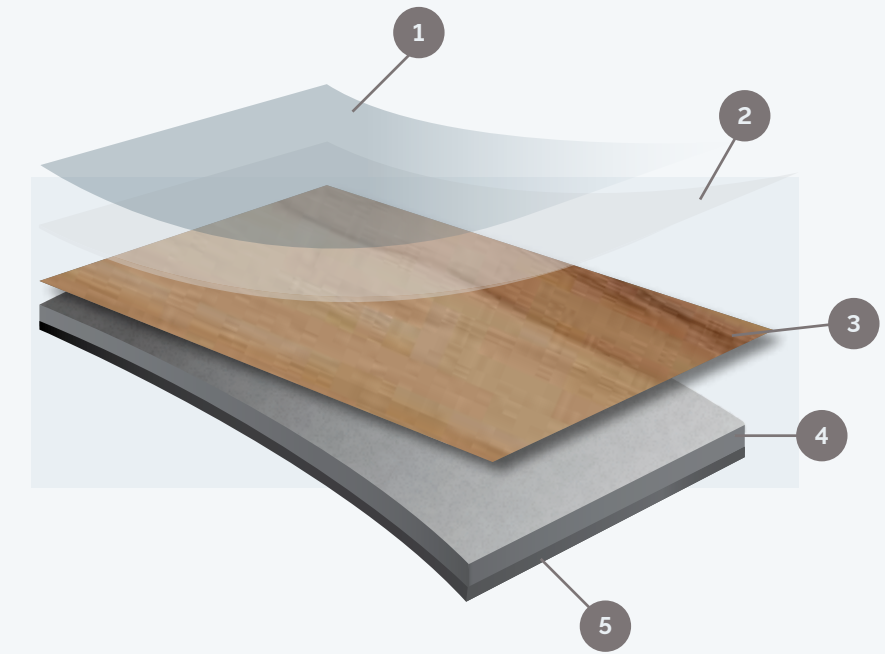

ReNew is the perfect and affordable solution for your residential projects and light commercial uses. Our LVT products have been specifically engineered to offer the best performance and maintenance while keeping our commitment to providing great design for every budget. Offering a wide range of visual looks from natural woods to modern stone, ReNew will outlast the competition in both style and durability.

- 1 PROT^X™ TOPCOAT**
Our trademarked, UV-cured urethane topcoat protects against abrasions and provides industry-leading scratch, scuff, stain, and chemical resistance for an easy-to-clean beautiful floor.
- 2 WEAR LAYER**
A textured layer of micro-beveled PVC protects against rips, tears, and indentations to extend the life and durability of your floor.
- 3 HIGH RESOLUTION DECORATIVE PRINT FILM**
Proprietary print technology gives Tilebar Luxury Vinyl Tile an exceptionally realistic style and uncompromising visual quality.
- 4 STABILIZING CORE**
Our superior stabilizing core maintains the integrity of the LVT panel, creating a weather-proof, waterproof, and expansion-proof system.
- 5 BACKING**
The textured backing offers an easy and secure method for adhesive application to make glue-down installation go quickly.

IRENEW Glue Down

TECHNICAL DATA

12 MIL SPECIFICATIONS	
In Stock and Ready to Ship	
Available Sizes:	12"x24" 6"x48"
Classification:	ASTM F1700 Class III, Type B
Total Thickness:	2.0 mm (0.80")
Wear Layer Thickness:	12 mil (0.30mm)
Edge Treatment:	Square Edge
Finish:	ProTx™
Color:	18
Application Type:	Glue Down
Adhesive:	TileBar Trowel or Roll
Backing Color:	Black
Pieces per Carton:	20 pcs
Weight per Carton:	34.3 lbs (6x48) 32.96 lbs (12x24)
Square Feet per Carton:	42.37 ft (6x48) 42.04 ft (12x24)
Cartons per Pallet:	60

6 MIL SPECIFICATIONS	
Select Colors in Stock	
Available Sizes:	12"x24" 6"x48"
Classification:	ASTM F1700 Class III, Type B
Total Thickness:	2.0 mm (0.80")
Wear Layer Thickness:	6 mil (0.15mm)
Edge Treatment:	Square Edge
Finish:	ProTx™
Color:	18
Application Type:	Glue Down
Adhesive:	TileBar Trowel or Roll
Backing Color:	Black
Pieces per Carton:	20 pcs
Weight per Carton:	34.3 lbs (6x48) 32.96 lbs (12x24)
Square Feet per Carton:	42.37 ft (6x48) 42.04 ft (12x24)
Cartons per Pallet:	60

Select colors from 6 mil wear layer thickness available by Special Order only. Minimum order one pallet, with an 8-12 week lead time.

APPLICATIONS


Commercial Spaces: Light Commercial (Rolling Loads Under 500 lbs.)

Residential: Multi-Family, Single Family

IRENEW Glue Down

TESTING SPECIFICATIONS

12 MIL + 6 MIL	
Flexibility (ASTM F137):	Passes - 1" Mandrel - No Crack/Break
Dimensional Stability (ASTM F2199):	Passes - Max 0.020 in/lin ft
Squareness (ASTM F540):	Passes - Max 0.010"
Static Load (ASTM F970 mod.):	Passes - Modified Test (anything beyond 250 PSI) = 2,000 PSI; Residual Indent \leq 0.005"
Residual Indentation (ASTM F1914):	Passes - $<$ 8% Avg / 10% Single Value
Flooring Radiant Panel (ASTM E648):	Passes - Class 1; \geq 0.45 watts/cm ²
Smoke Density (ASTM E662):	Passes - \leq 450
Slip Resistance (ASTM D2047):	Passes - SCOF \geq 0.6
Resistance to Light (ASTM F1515):	Passes - $\Delta\Sigma \leq$ 8.0
Chemical Resistance (ASTM F925):	Excellent
Resistance to Heat (ASTM F1514):	Passes

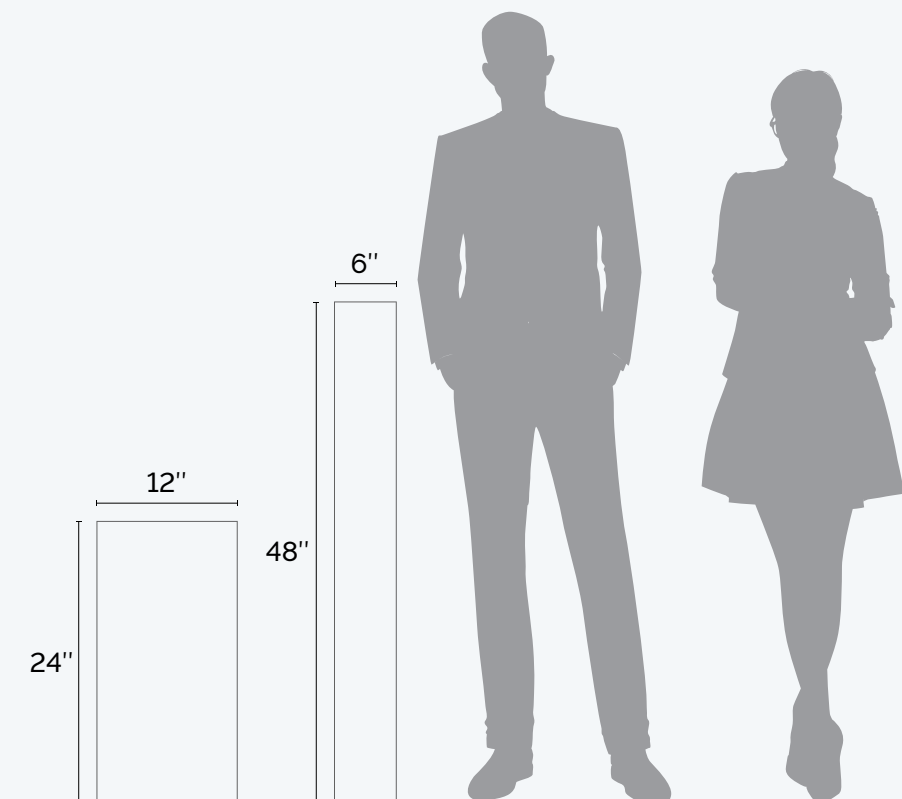



tilebar LVT
LUXURY VINYL TILE

| RESEARCHED. DESIGNED. REFINED.

TileBar LVT bridges the gap between luxe natural flooring and the ease of modern maintenance. Our team of resilient flooring experts are committed to the thoughtful research and development required to ensure that your floor will exceed your expectations of quality, performance, and value. Explore our luxury collections that will keep looking their best for years to come.

tilebar.com
888.277.2260 | trade@tilebar.com
RAISING THE TILEBAR